

## Standard Features

### Four standard color options:

- Class 1 Bronze anodized
- Class 1 Clear anodized
- Sky White
- Desert Tan



### Heavy Wall 6063-T6 aluminum

- 4.5" block perimeter frame
- Stainless steel track insert
- Head, jamb, and sill closures
- Adjustable reinforced jamb strike with integral dust box
- Thermally-broken frame & panels for 1" glazing
- Insect screen

### All stainless steel hardware

- Brushed stainless flush pulls and actuator
- Easy action lever-latch
- Maximum security laminated hook-lock
- Precision bearing tandem rollers



## Configurations

Our 4500 Series can be produced in numerous configurations, including: XO, OX, XOX, OXO, XOO, OOX, and OXXO.

**Maximum panel width: 84"**

**Maximum panel height: 144"**

## Optional Features

- Heavy Lockstile
- Motorization/Automation
- #275 "Easy-Glide" tandem roller package
- #350 "Super-Glide" tandem roller package
- #450 "Monumental" tandem roller package
- Color coordinated hardware
- Custom Colors
- Specialty & custom pulls
- Keyed locks



### Precision Bearing Glide Options

The 4500 Series glide options feature precision engineered stainless steel tandem rollers in three rail sizes:

- 2.75" bottom rail with E-Z Glide rollers
- 3.50" bottom rail with Super-Glide rollers
- 4.50" bottom rail with "Monumental" rollers

### Motorization/Automation

The 4500 Series Sliding Glass Door can be motorized (hardwired or wireless) for operation - and integrated with your home automation system - using our Doors-in-Motion automation system, as well as other motorization options.

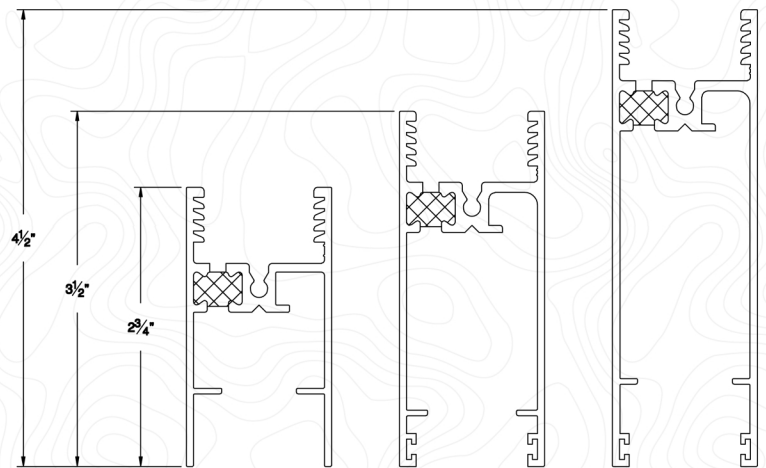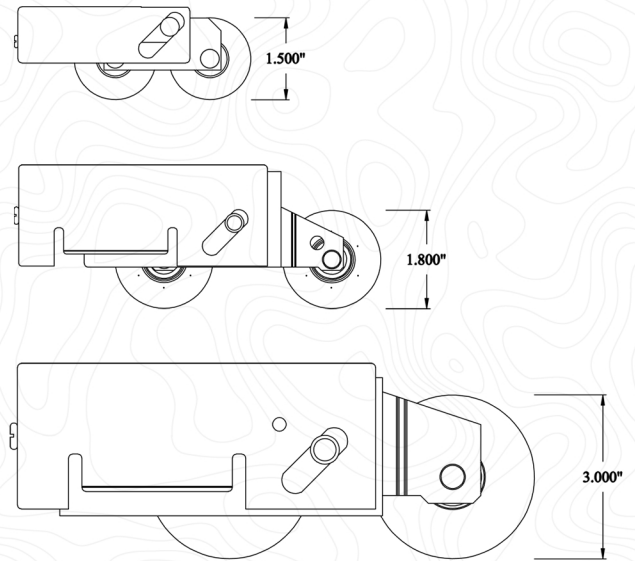

2 3/4" Rail is not available using the Concealed Slim-Track

